


Console Access on HP/3COM OfficeConnect Managed Gigabit Switch



1. Purchase [USB console cable](#)
2. In Windows, plug in cable, search for Device Manager, then click on "Update Driver" on any Serial port items that show warnings. The internet found and installed working drivers for me.
3. Optionally download the manual for the switch. [OfficeConnect 3CDSG8 Manual](#)
4. Download and Install [PuTTY](#)
5. Create a serial connection with the following settings, BAUD 38,400/8 bit/no parity/1 stop bit/no hardware flow control


6. Log on to the switch as admin and refer to the screenshot below to disable DHCP and configure a static IP address.

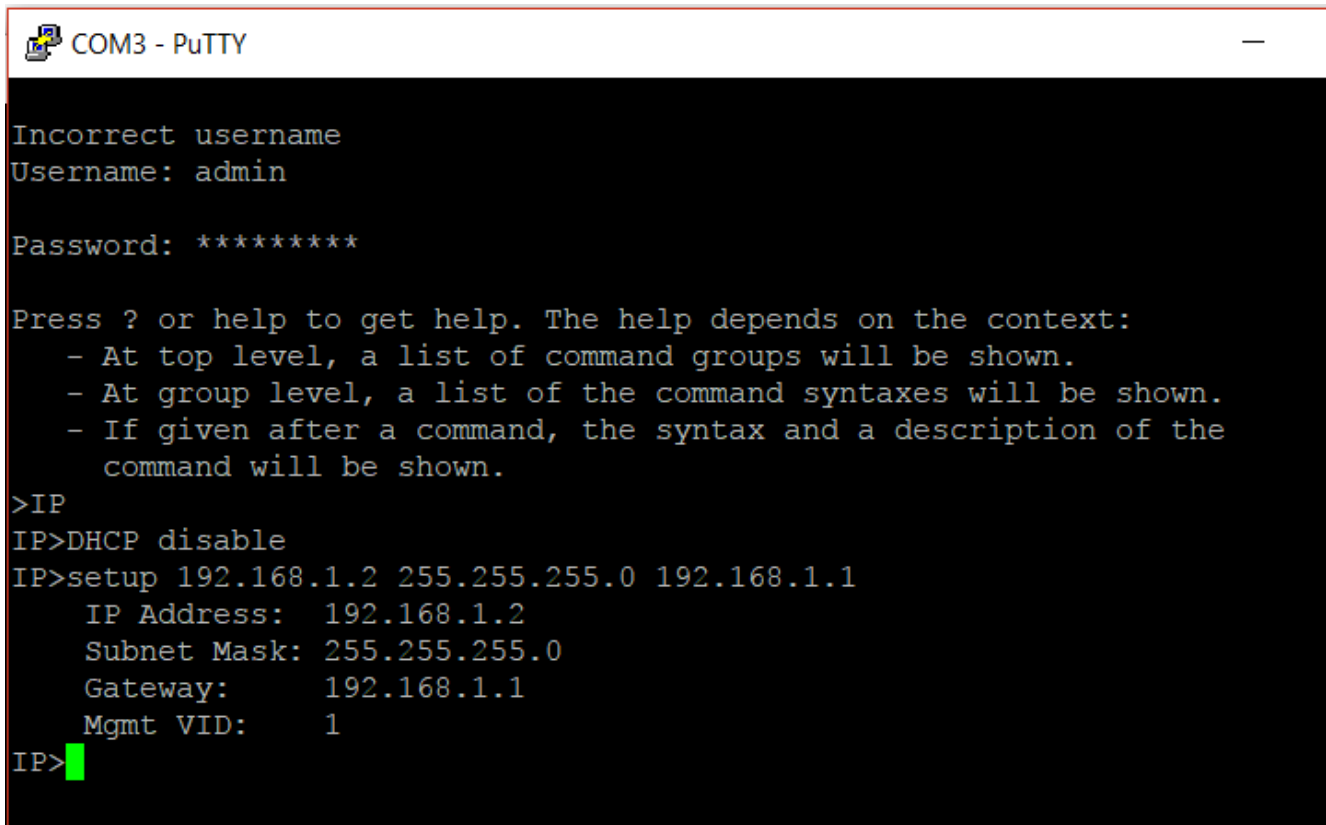

```
COM3 - PuTTY
Incorrect username
Username: admin
Password: *****

Press ? or help to get help. The help depends on the context:
- At top level, a list of command groups will be shown.
- At group level, a list of the command syntaxes will be shown.
- If given after a command, the syntax and a description of the
  command will be shown.
>IP
IP>DHCP disable
IP>setup 192.168.1.2 255.255.255.0 192.168.1.1
  IP Address: 192.168.1.2
  Subnet Mask: 255.255.255.0
  Gateway: 192.168.1.1
  Mgmt VID: 1
IP>
```

Next ping the new IP address, and attempt to connect using a web browser.

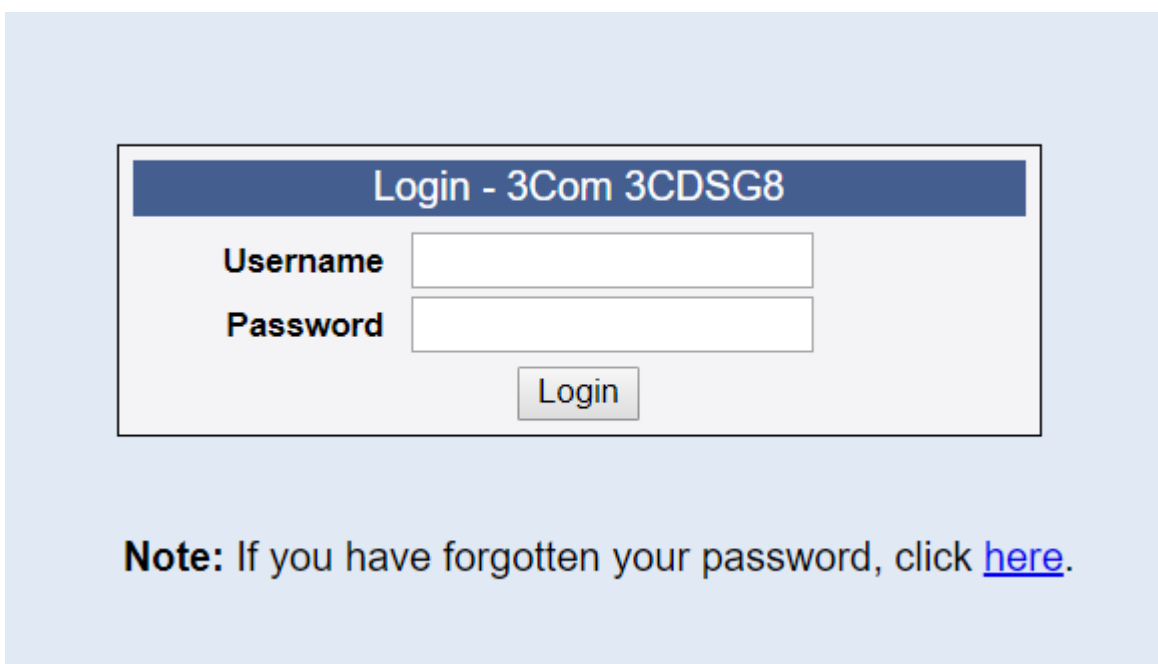

Log in using the same admin and password as with the console.

OfficeConnect Managed Gigabit Switch 8

System Information

This page displays the status of your switch.

REFRESH

System Identity	
System Name	3Com 3CDSG8
System Location	
System Contact	
Number of Ports	8
Hardware Version	R0A
Software Version	oc801_00_05a
Serial Number	2AFGE3PFD5D40
System Up Time	5 days, 6 hours, 51 minutes, 52 seconds

Address Information	
Management VLAN	1
IP Address	192.168.1.2
Subnet Mask	255.255.255.0
Gateway IP Address	192.168.1.1